






HD-PE Channel SLOPE 100/100

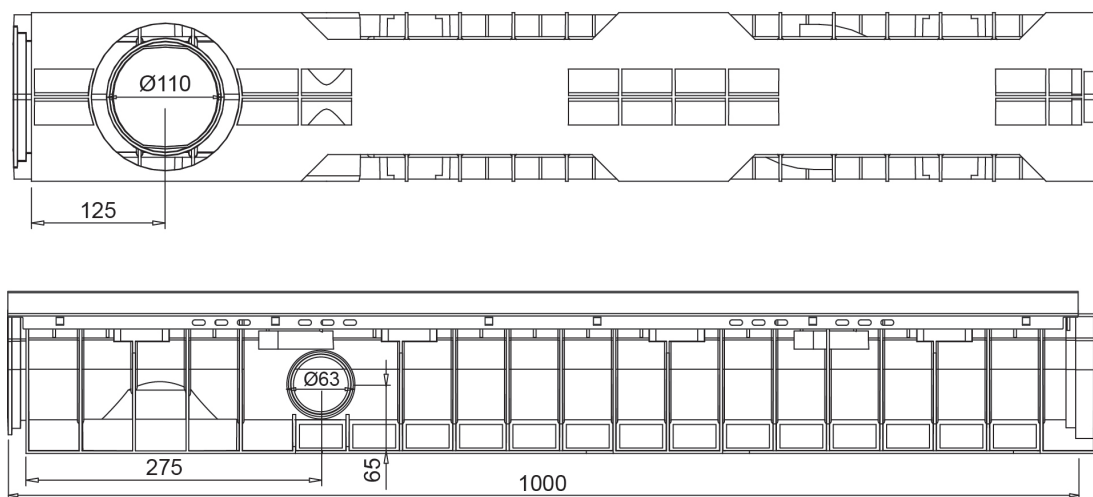

Watertight: to ensure the watertight of the channels, it is advisable to use a bituminous sealing adhesive. As a complete and long lasting guarantee of the absence of leakages through the joints of the channels, it is possible to heat-weld the joints.

Dimensions and features

N.B. Dimensions and weights are subjected to the normal tolerances of the manufacturing

Length (mm)	1000
External width (mm)	158
External high (mm)	156
Internal width (mm)	100
Internal height (mm)	100
Outlets	2x \varnothing 63 (lateral), 1x \varnothing 110 (bottom)
Material	HD-PE
Weight (Kg)	4.50
Drainage section (cm ²)	89.56
Capacity (dm ³ = litri)	8.95

Compatible Gratings

Slot 20 mm

Ductile Iron

Load class C250 - D400 - E600