




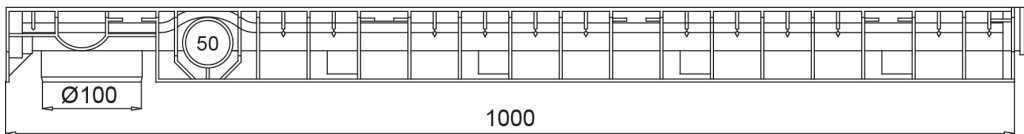

HD-PE Channel EASY 200/40

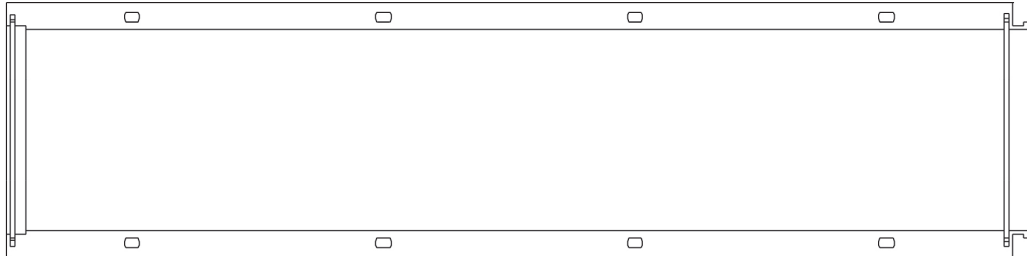

Watertight: to ensure the watertight of the channels, it is advisable to use a bituminous sealing adhesive. As a complete and long lasting guarantee of the absence of leakages through the joints of the channels, it is possible to heat-weld the joints.

Dimensions and features

N.B. Dimensions and weights are subjected to the normal tolerances of the manufacturing

| | |
|-------------------------------------|--|
| Length (mm) | 1000 |
| External width (mm) | 258 |
| External high (mm) | 74 |
| Internal width (mm) | 200 |
| Internal height (mm) | 40 |
| Outlets | 2x \varnothing 50 (lateral), 1x \varnothing 100 (bottom) |
| Material | HD-PE |
| Weight (Kg) | 2.10 |
| Drainage section (cm ²) | 76.50 |
| Capacity (dm ³ = litri) | 7.65 |

Compatible Gratings

| | | |
|-----------------------|------------------------------------|-----------------|
| Slotted | Galvanized Steel / Stainless Steel | Load class A15 |
| Mesh 33x11 | Galvanized Steel / Stainless Steel | Load class B125 |
| Mesh 33x33 | Galvanized Steel / Stainless Steel | Load class B125 |
| Mesh | Ductile Iron | Load class B125 |
| Slot 13 mm | Ductile Iron | Load class C250 |
| Longitudinal slot "T" | Galvanized Steel / Stainless Steel | Variable |

The products have to be installed according to MufleSystem's specification (available on our web site)