




## Polyamide Grating VIP/SMART 150 B125 - Slot 16 mm

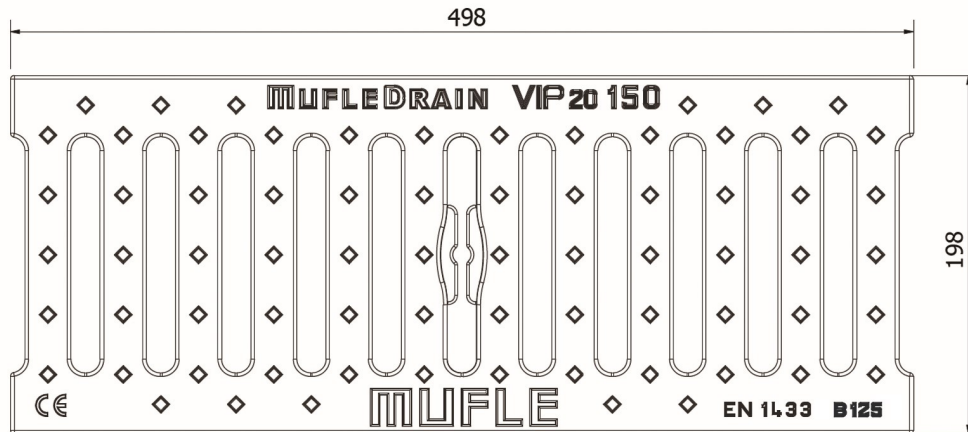

Load class in accordance with the norm EN 1433.

### Dimensions and features

N.B. Dimensions and weights are subjected to the normal tolerances of the manufacturing

Length (mm)	498
Total width (mm)	198
Internal width (mm)	150
Height (mm)	20
Slot dimensions F1x F2 (mm)	130 x 16
Material	Polyamide
Weight (Kg)	1.8
Drainage surface (dm <sup>2</sup> )	2.49
Fixing system	Tie Rods
Surface finishing	-
Resistance (Norm UNI-EN1433)	B125

### Compatible Channels

VIP/SMART 150/160  
VIP/SMART 150/100

### Application

Parking Areas  
Multilevel Parking  
Sidewalk