




## HD-PE Channel VIP 200/160

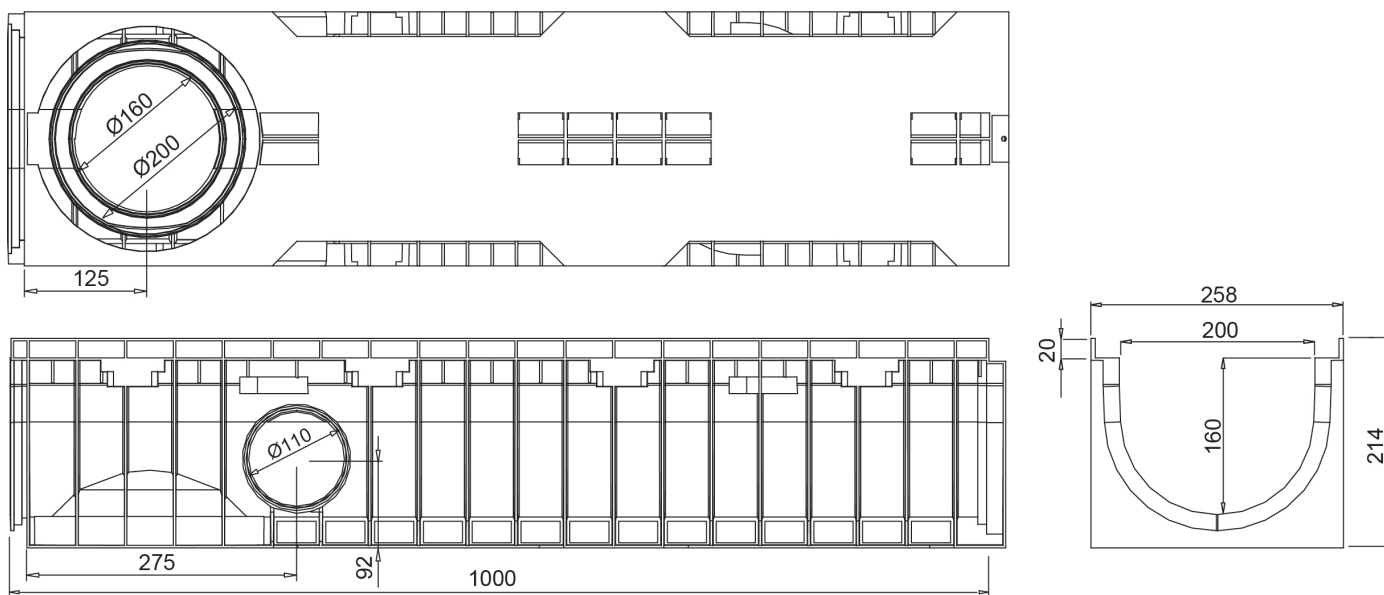

**Watertight:** to ensure the watertight of the channels, it is advisable to use a bituminous sealing adhesive. As a complete and long lasting guarantee of the absence of leakages through the joints of the channels, it is possible to heat-weld the joints.

## Dimensions and features

N.B. Dimensions and weights are subjected to the normal tolerances of the manufacturing

|                                     |   |
|-------------------------------------|---|
| Length (mm)                         | 1000  |
| External width (mm)                 | 258   |
| External high (mm)                  | 214   |
| Internal width (mm)                 | 200   |
| Internal height (mm)                | 160   |
| Outlets                             | 2x $\varnothing$ 110 (lateral), 1x $\varnothing$ 200/160 (bottom) |
| Material                            | HD-PE   |
| Weight (Kg)                         | 3.40  |
| Drainage section (cm <sup>2</sup> ) | 275.87  |
| Capacity (dm <sup>3</sup> = litri)  | 27.58   |

## Compatible Gratings

|            |                                    |                        |
|------------|------------------------------------|------------------------|
| Slotted    | Galvanized Steel / Stainless Steel | Load class A15         |
| Mesh 33x11 | Galvanized Steel / Stainless Steel | Load class B125 - C250 |
| Mesh 33x33 | Galvanized Steel / Stainless Steel | Load class B125 - C250 |
| Mesh       | Ductile Iron                       | Load class B125        |
| Slot 20 mm | Ductile Iron                       | Load class C250        |
| ECOVIP     | PE-HD                              | Pedestrian             |

The products have to be installed according to MufleSystem's specification (available on our web site)