


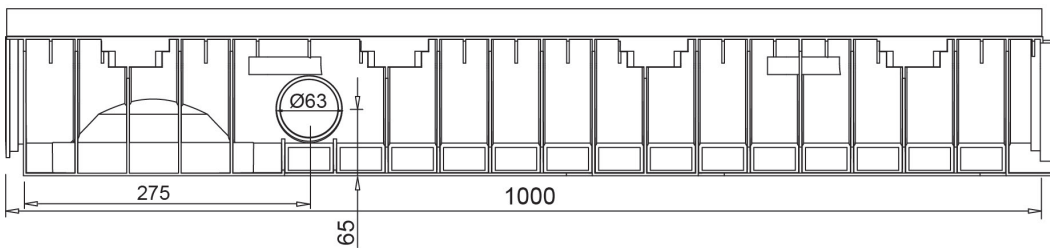




HD-PE Channel WING 150/100

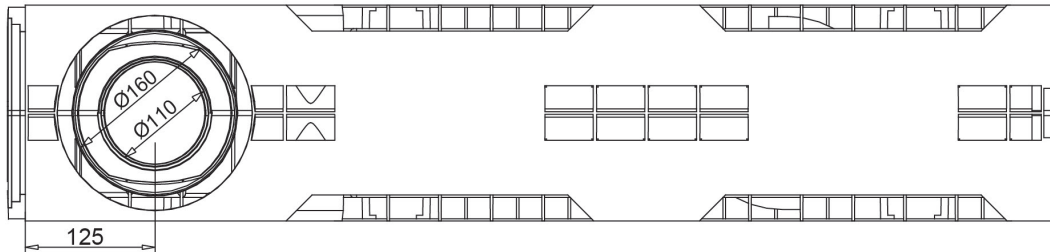

Watertight: to ensure the watertight of the channels, it is advisable to use a bituminous sealing adhesive. As a complete and long lasting guarantee of the absence of leakages through the joints of the channels, it is possible to heat-weld the joints.

Dimensions and features

N.B. Dimensions and weights are subjected to the normal tolerances of the manufacturing

| | |
|-------------------------------------|--------------------------------------|
| Length (mm) | 1000 |
| External width (mm) | 208 |
| External high (mm) | 161 |
| Internal width (mm) | 150 |
| Internal height (mm) | 100 |
| Outlets | 2xØ63 (lateral), 1xØ160/110 (bottom) |
| Material | HD-PE |
| Weight (Kg) | 4.80 |
| Drainage section (cm ²) | 127.32 |
| Capacity (dm ³ = litri) | 12.73 |

Compatible Gratings

| | | |
|---------------------------|------------------------------------|--------------------------------------|
| Mesh 33x11 | Galvanized Steel / Stainless Steel | Load class C250 |
| Mesh 33x33 | Galvanized Steel / Stainless Steel | Load class C250 |
| Slot 20 mm | Ductile Iron | Load class C250 - D400 - E600 - F900 |
| Mesh | Ductile Iron | Load class D400 |
| Solid top cover | Ductile Iron | Load class E600 |
| Longitudinal slot "T"/"L" | Galvanized Steel / Stainless Steel | Variable |
| Air System | Ductile Iron | Load class E600 |

The products have to be installed according to MufleSystem's specification (available on our web site)